

PA 130 & 170

AMPLIFIER



Power Supply
AC: 220-240V 50/60Hz



Signal to Noise Ratio
60 dB




Speaker Output
4 ohms, 8 ohms, 100 V

Technical Specifications

Model	ATDSC PA 170	ATDSC PA 130
Power Output	245WMax., 175WRMS at 10% THD, 110 WRMS at 5% THD	175WMax., 130WRMS at 10% THD,110WRMS at 5% THD
Output Regulation	2dB, no load to full load at 1kHz	2 dB, no load to full load at 1kHz
Input Channels	5XMic 0.65mV/4.7k ohm 2XAux 100mV/470k ohm	5XMic 0.65mV/4.7k ohm 2XAux 100mV/470k ohm
Frequency Response	50-15,000Hz $\pm$ 3dB	50-15,000Hz $\pm$ 3dB
Signal to Noise Ratio	60dB	60dB
Tone Controls	Bass $\pm$ 10dB at 100Hz Treble $\pm$ 10dB at 10KHz	Bass $\pm$ 10dB at 100Hz Treble $\pm$ 10dB at 10KHz
Outputs	Line: 200mV/600ohm, 1V/1kohm	Line: 200mV/600ohm, 1V/1kohm
Speaker Output	4ohm, 8ohm & 100V	4ohm, 8ohm & 100 V
Digital Player	Mp3 Player with USB, SD Card & Bluetooth	Mp3 Player with USB, SD Card & Bluetooth
Power Supply	AC: 220-240V 50/60Hz, DC: 12V Power Consumption: AC: 250VA DC : 4A	AC: 220-240V 50/60Hz, DC: 12V Power Consumption: AC: 250VA DC: 4A
Power Consumption Consist of	AC: 250VA DC 4A USB Pen drive Port SD Card Plug and Play Compatible with Radio & Bluetooth, EQ & Recording 5 Channels Microphone Inputs 2 Channels Aux Inputs 1 Channel Line Output 100V Constant Voltage Output and 4 Ω \ 8 Ω \16 Ω Resistance Output	AC: 250VA DC 4A USB Pen drive Port SD Card Plug and Play Compatible with Radio & Bluetooth, EQ & Recording 5 Channels Microphone Inputs, 2 Channels Aux Inputs 1 Channel Line Output 100V Constant Voltage Output and 4 Ω \ 8 Ω \16 Ω Resistance Output

AVAILABLE THROUGH PAN INDIA DISTRIBUTOR & DEALER NETWORK

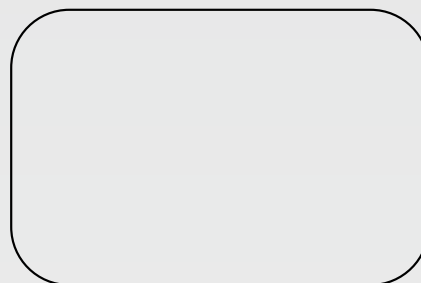

www.atdscindia.com