

CU 100 DU 100

WIRED AUDIO CONFERENCE SYSTEM



Power
1W



Sensitivity
-44dB $\pm$ 2dB



Voltage
DC18V

Technical Specifications

Microphone Base Unit


- Frequency response: 40Hz-16KHz
- Sensitivity: -44db±2db
- Reference sound receiving distance: 20~120cm
- Embedded installation and detachable microphone system.
- Power supply for all the microphones is provided by the main unit.
- 8-PIN T-type hand-in-hand loop-in-loop-out cable.
- LED- Red indicator lamps show the status of the microphone
- Talk Button with Dual Colour LED Light.
Green Color - On & Red Color - Talk
- Chairman unit number is unrestricted, can join in any position in the conference
- Priority Button: Chairman can mute Delegate MIC. by priority button
- Indicative sound for the chairman unit(optional)
- On/Off Button

MICROPHONE UNIT CONSIST OF

- ✦ Microphone type – Electric capacity
- ✦ Optional Microphone size are available.
- ✦ Polar Pattern – Cardioid
- ✦ LED light: Red ring LED light

Technical Specifications

Model	Microphone Unit 100 CU/100 DU
Voltage	DC18V (Supply by 8 PIN cable)
Power Consumption	1W
T.H.D.	<0.05%
Dimension	Base: 120 x 85 x 20 mm
	Mic. 420mm (Length)
Sensitivity	-44dB $\pm$ 2dB
Frequency response	100Hz-16KHz
Net Weight	0.7 Kg
Color	Black
Installation	Tabletop

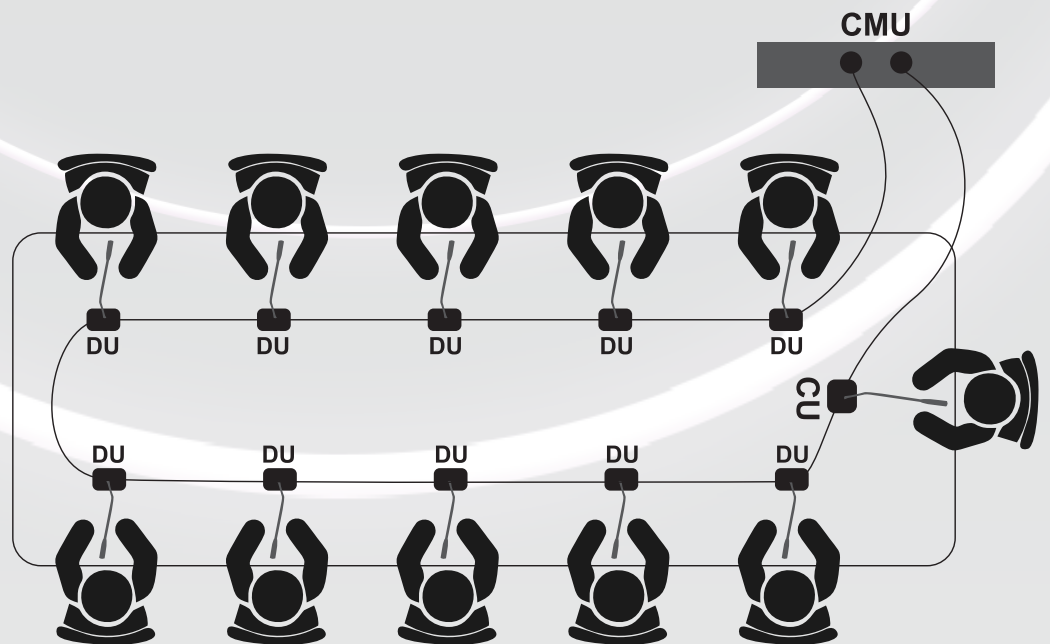

AVAILABLE THROUGH PAN INDIA DISTRIBUTOR & DEALER NETWORK



www.atdscindia.com