

PA 350 & 500

AMPLIFIER



Power Supply
AC: 220-240V 50/60Hz



Signal to Noise Ratio
60dB




Speaker Output
4 ohms, 8 ohms & 100V

Technical Specifications

Model	ATDSC PA 350	ATDSC PA 500
Power Output	410W Max., 350W RMS at 10% THD, 350W RMS at 5% THD	550W Max., 450W RMS at 10% THD, 440W RMS at 5% THD
Output Regulation	2dB, no load to full load at 1kHz	2 dB, no load to full load at 1 kHz
Input Channels	5 X Mic 0.65m V/4.7k ohms 2 X Aux 100m V/470k ohms	7 X Mic 0.65m V/4.7k ohms 2 X Aux 100m V/470k ohms
Frequency Response	50-15,000Hz ± 13dB,	50-15,000Hz ± 3dB
Signal to Noise Ratio	60dB	60dB
Tone Controls	Bass ± 10dB at 100Hz, Treble ± 10dB at 10KHz	Bass ± 10dB at 100Hz, Treble ± 10dB at 10KHz
Outputs	Line: 200mV/600 ohms, 1V/1k ohms	Line: 200m V/600 ohms, 1V/1k ohms
Speaker Output	4 ohms, 8 ohms & 100V	4 ohms, 8 ohms & 100V
Digital Player	Mp3 Player with USB, SD Card & Bluetooth	Mp3 Player with USB, SD Card & Bluetooth
Power Supply	AC: 220-240V 50/60Hz, DC: 12V Power Consumption: AC: 250VA DC :4A	AC: 220-240V 50/60Hz, DC: 12V Power Consumption: AC: 250VA DC :4A
Power Consumption Consist of	AC: 250VADC 4A USB Pen drive Port SD Card Plug and Play Compatible with Radio & Bluetooth, EQ & Recording 5 Channels Microphone Inputs 2 Channels Aux Inputs 1 Channel Line Output 100V Constant Voltage Output and 4Ω\ 8 Ω\16 Ω Resistance Output.	AC: 250VADC 4A USB Pen drive Port SD Card Plug and Play Compatible with Radio & Bluetooth EQ & Recording 5 Channels Microphone Inputs 2 Channels Aux Inputs 1 Channel Line Output 100V Constant Voltage Output and 4Ω\ 8 Ω\16 Ω Resistance Output.

AVAILABLE THROUGH PAN INDIA DISTRIBUTOR & DEALER NETWORK

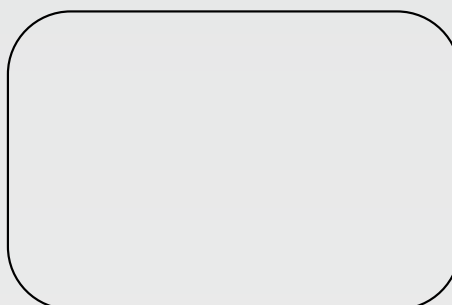

www.atdscindia.com